

Weatherking®

Weatherking is a cold process modified adhesive that contains advance fiber formulations to provide superior sag resistance with exceptional weatherability. A unique blend of Styrene-Ethylene-Butadiene-Styrene and Styrene-Isoprene-Styrene (SEBS and SIS) modifiers maintain flexibility and provides excellent UV resistance and heat stability.



SUPERIOR MODIFIED FORMULATION

Weatherking contains an advanced fiber formulation which provides excellent slope resistance allowing Weatherking to be applied on slopes up to 3:12.




COLD PROCESS FORMULATION

Weatherking eliminates the need for kettles, heat sources and bulky roof top equipment. Its cold process, low odor formulation allows roofing projects to proceed without disruptions to the buildings operations and occupants.



EASE OF APPLICATION

Due to Weatherking's cold process formulation the system can be installed with squeegees and spray equipment instead of hot kettles and bulky mops and mop carts. This not only makes the job site safer but can lead to a quicker install with experience installers.

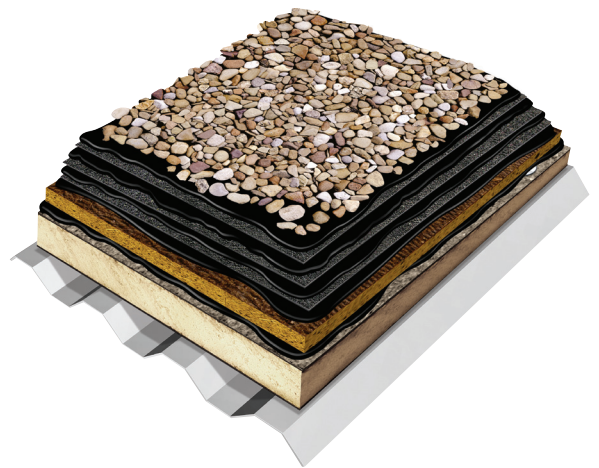

MULTI-PLY CONSTRUCTION

Weatherking cold process systems are constructed with multiple plies of Garland's HPR Tri-Base Premium, HPR Premium Glasbase or HPR Glasbase modified base sheets. It can also be used with Garland's 2-ply modified sheets.

Features

Benefits

Superior Protection

Weatherking is an asphalt-based, cold process, roofing adhesive that when combined with two or three plies of Garland approved sheets creates a long lasting superior waterproofing system.

Environmentally Safe

Weatherking uses very little solvent which helps maintain EPA compliant levels of VOC's. When a Weatherking system cures, it initially looks like hot applied rubberized asphalt; however there is no need for a torch or hot kettle.

User Friendly

The ease of application makes a Weatherking system extremely fast and simple to install. This cold process roofing adhesive can be installed with a squeegee or spray equipment making it easy for roofing crews to use.

VOC Compliant

Weatherking modified adhesive is VOC compliant to ensure that excessive amounts of solvent vapors are not released into the atmosphere.

Strong Adhesion

The Weatherking system combines the strength and proven performance of a multi-ply configuration with the durability of an elastomeric roof system.

For more information, visit us at: www.garlandco.com



The Garland Company, Inc.

3800 E. 91st Street
Cleveland, OH 44105
FAX: 216-641-0633
Phone: 216-641-7500
Toll Free: 1-800-321-9336

Garland Canada Inc.

209 Carrier Drive
Toronto, ON M9W 5Y8
FAX: 416-747-1980
Phone: 416-747-7995
Toll Free: 1-800-387-5991 (Canada Only)

The Garland Company UK, LTD

Unit 5, Glevum Works, Upton Street
Gloucester, UK GL1 4LA
FAX: 01452 330 657
Phone: 01452 330 646
Nat. Tel.: 0800 328 5560 (Only in UK)