


FINGER CUT

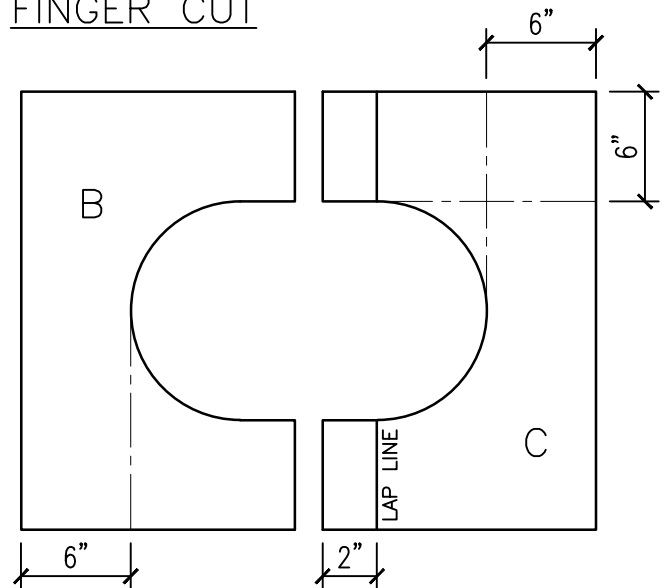

TARGET REINFORCEMENT

NOTES:

- A. USE SCRIM DETAIL IN CONJUNCTION WITH THE TUFF-FLASH PLUS LO DRAWING.
- B. EMBED ALL PRE-CUT SCRIM INTO A 32 WET MIL BASE COAT OF TUFF-FLASH PLUS LO.
- C. ENSURE TOTAL TARGET AREA OF FLASHING IS NO LESS THAN 16"X 16".
- D. REMOVE MASKING IMMEDIATELY AFTER APPLICATION OF TOP COAT.
- E. REFER TO TUFF-FLASH PLUS LO APPLICATION INSTRUCTIONS FOR GENERAL GUIDELINES REGARDING THE TUFF-FLASH PLUS LO SYSTEM.



THE GARLAND COMPANY, INC.
 GARLAND CANADA, INC.
 THE GARLAND COMPANY UK, LTD

PIPE SCRIM DETAIL

TUFF-FLASH PLUS LO FLASHING SYSTEM