

High-Performance Adhesive

Green-Lock™ Plus White

Green-Lock Plus White is a high-performance adhesive for new roofs that can be used to construct multi-ply modified bitumen roofing systems, or as a reflective surfacing option when combined with white marble aggregate.



Sustainable

- 100% solids, Zero VOCs, Solvent-free
- Helps reduce energy spending
- Can lower carbon footprint of roofing assembly



Applicator-Friendly

- Ready-to-use, apply with roller, or squeegee
- Rain-safe
- Low-odor



Outstanding Versatility

- Compatible with asphalt-based mastics, adhesives & sealers
- Apply directly to cover board, base membrane or cap membrane
- Used as an interply adhesive and/or floodcoat adhesive with aggregate



A cold-applied interply you can trust.

A flood coat providing sustainable benefits for the life of the roof.

A new standard for high-performance adhesives.



The Garland Company, Inc

3800 East 91st Street, Cleveland, OH 44105
Phone: 216-641-7500 | Toll Free: 800-321-9336 | Fax: 216-641-0633

www.garlandco.com

0323 ©2023 Garland Industries

High-Performance Adhesive Green-Lock Plus White

Features & Benefits

Meet sustainability goals

Environmentally-preferable formulation

With 100% solids, zero VOCs, and no solvents, using Green-Lock Plus White ensures a low-odor installation to help minimize disruption during a project and meet sustainability goals for the life of the roof.

Helps reduce energy spending

Provides added UV protection that greatly reduces thermal shock while maintaining internal temperatures.

Lower carbon footprint

Green-Lock Plus White's non-asphaltic formulation reduces fossil fuels used in a roofing assembly.

Ease of application

Ready-to-use with roller or squeegee

Green-Lock Plus White is easy to apply by roller or squeegee, and when combined with a white marble roofing aggregate, provides a highly reflective and durable surfacing option.

Cures fast

Green-Lock Plus White cures by reacting with moisture in the air in just 4-6 hours.

Protect an entire roofing system

Green-Lock Plus White Adhesive can be directly applied to G-P Gypsum DensDeck Prime®, DensDeck DuraGuard®, SecuRock®, or high density asphalt coated wood fiberboard, as well as single or multiple plies of Garland approved base sheets and Garland approved membranes.


Outstanding versatility

High performance modified bitumen systems

Green-Lock Plus White Adhesive is compatible with asphalt-based roofing mastics, adhesives and sealers and resists softening and staining of modified bitumen membranes.

Performance on sloped systems

Functions equally well on flat systems up to slopes as steep as 3:12.

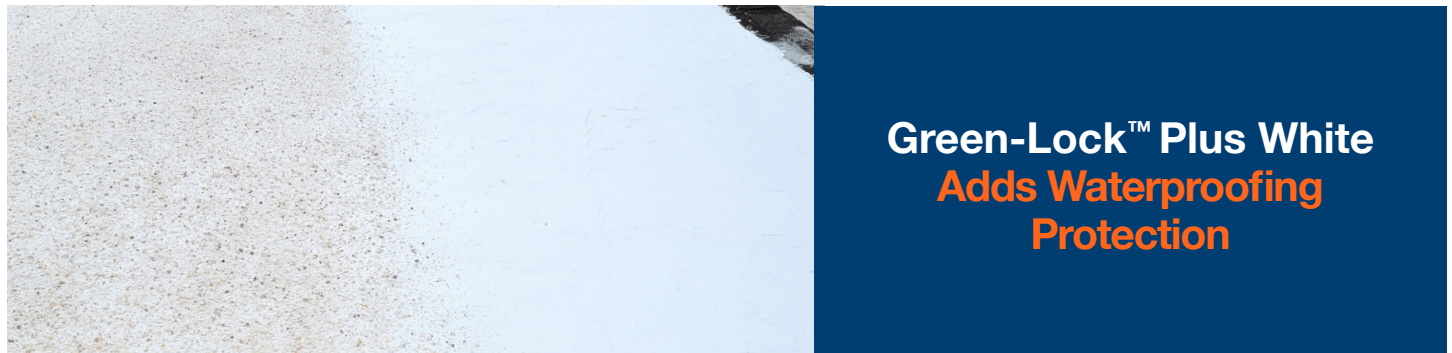

Green-Lock™ Plus White
Adds Waterproofing
Protection

Advantages of Green-Lock Plus White



Low-VOC, Low Odor,
100% Solids Formulation



Excellent UV
Resistance



Use as Interply or
Flood Coat



Provides Waterproofing
Protection



Ease of application via
roller or squeegee



The Garland Company, Inc

3800 East 91st Street, Cleveland, OH 44105

Phone: 216-641-7500 | Toll Free: 800-321-9336 | Fax: 216-641-0633

www.garlandco.com

0323 ©2023 Garland Industries