





OVERVIEW & FEATURES

R-Mer Soffit panels can be used to help reduce negative uplift pressures experienced by roofs due to open overhangs. Available in both solid and vented profiles up to 12' in length, R-Mer Soffit can fill your most demanding needs. Our .032 aluminum soffit is available in 16 standard Garland colors with Kynar 500[®] Finish.


PANEL PROFILES

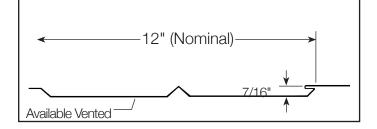

SEAM DETAIL

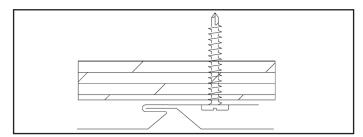

STANDARD ASSEMBLY

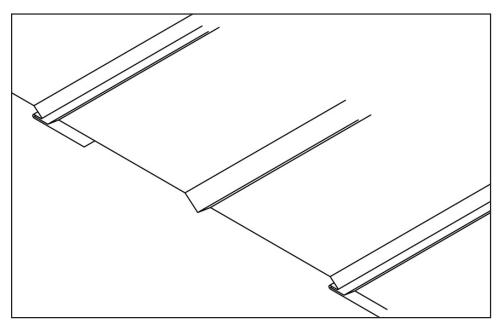







DESIGN CHARACTERISTICS

- Available in .032 aluminum in 16 standard Garland colors
- Standard width is 12"
- Available in lengths up to 12'
- Available in vented and non-vented

NOTE: Not to be used in wall panel or fascia application.

ECO-FACTS

Eco-Facts	R-Mer Soffit Aluminum	R-Mer Soffit Steel
Recycled Content		
Pre-Consumer	21%	11%
Post-Consumer	10%	36%



For more information, visit us at: <u>www.garlandco.com</u>

 The Garland Company, Inc.

 3800 East 91st Street

 Cleveland, OH 44105

 FAX: 216-641-0633

 Phone: 216-641-7500

 Toll Free: 800-321-9336

Garland Canada Inc. 209 Carrier Drive Toronto, Ontario Canada, M9W 5Y8 FAX: 416-747-1980 Phone: 416-747-7995 Toll Free: 800-387-5991 (Only in Canada) Tests verified by independent laboratories. Actual roof performance specifications will vary depending on test speed and temperature. Data reflects samples randomly collected. A \pm 10% variation may be experienced. The above data supersedes all previously published information. Consult your local Garland Representative or Garland Corporate Office for more information.

R-Mer is a trademark of The Garland Company, Inc. and Garland Canada Inc. Kynar is a registered trademark of Elf Atochem North America Inc.

© 2025 The Garland Company, Inc. RME

RMER SOFFIT 0825