


SA Primer

SA Primer is a polymer emulsion-based primer designed to improve the adhesion of self-adhered membranes. SA Primer is applied to cinder block, concrete, OSB, plywood, DensGlass Gold®, Securock, DensDeck® Prime and prepped metal surfaces. SA Primer is designed to be used with HPR® SA FR Base Sheet in a Garland 2-ply low slope roofing system, HPR® Aqua Shield in a steep slope roofing system, or Aero-Block™ SA in a wall air barrier system.

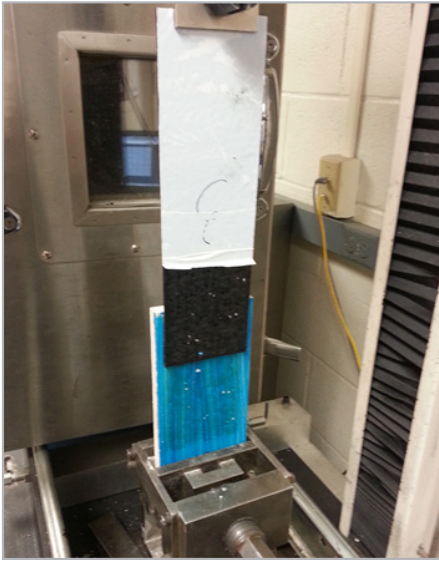

Improved Adhesion Benefits

The SA Primer will improve the adhesion of your self-adhering membrane to the substrate by as much as four times over being applied without the primer.



Dries Quickly Eliminating Project Delays

The SA Primer dries in 2 hours at 77°F (25°C). This allows your project to be completed sooner and with fewer disruptions to the facility's operations.



Low Odor & VOC Content

SA Primer eliminates the need for kettles, heat sources and bulky rooftop equipment. Its cold process, low odor formulation allows projects to proceed without major disruptions to the building's operations and occupants.



Environmentally Friendly System

The SA Primer combined with any self-adhering Garland system is a safe and easy system to install. The SA Primer can be installed with roller or spray equipment making the installation very quick and clean.

SA Primer

Features

Benefits

Quick Drying

The SA Primer dries in 2 hours at 77°F (25°C) eliminating any delays related to drying of the primer. This allows your project to be completed sooner and with fewer disruptions to the facility's operations.

Improved Membrane Adhesion

The SA Primer increases the adhesion of all of Garland's self-adhering membranes to cinder block, concrete, OSB, plywood, DensGlass Gold, Securock, DensDeck Prime, prepped metal surfaces, or any StressPly® SA approved cover boards.

Low VOC Content & Odor

SA Primer is a water-based, low odor product minimizing odor concerns over hot applications or solvent-based material in VOC sensitive areas like hospitals, schools and food production plants.

Versatile Application

SA Primer is a water-based primer that is designed to be used with any self-adhering membrane. It works great for low slope application with our StressPly SA system, in steep slope applications with our HPR Aqua Shield membrane and in wall systems with our Aero-Block SA membrane.

User Friendly

The ease of application makes the SA Primer extremely fast and simple to install. This product can be installed with roller or spray equipment, making it quick to install and easy to clean up.

For more information, visit us at: www.garlandco.com



The Garland Company, Inc.

3800 E. 91st Street
Cleveland, OH 44105
FAX: 216-641-0633
Phone: 216-641-7500
Toll Free: 1-800-321-9336

Garland Canada Inc.

209 Carrier Drive
Toronto, ON M9W 5Y8
FAX: 416-747-1980
Phone: 416-747-7995
Toll Free: 1-800-387-5991 (Canada Only)

The Garland Company UK, LTD

Unit 5, Glevum Works, Upton Street
Gloucester, UK GL1 4LA
FAX: 01452 330 657
Phone: 01452 330 646
Nat. Tel.: 0800 328 5560 (Only in UK)

HPR is a registered trademark of The Garland Company, Inc., Garland Canada Inc., and The Garland Company UK, LTD
Aqua-Shield, Aero-Block, and SA Primer are trademarks of The Garland Company, Inc.
DensGlass Gold®, DensDeck® are registered trademarks of Georgia-Pacific Gypsum LLC.