

Roll Goods

VaporSmart® SA

Air Barrier

VaporSmart® SA is a strong, durable self-adhering air barrier/vapor retarder that can provide up to 6 months of temporary waterproofing protection during a roof system installation.



Temporary roof cover

- Adds flexibility to installation schedule
- Proven short and long-term durability



Faster installation

- Superior adhesion
- Fewer seams line up with type-B metal decking
- Laps line up with type-B metal decking flutes



Watertight


- Self-healing properties maintain seal around fasteners



Keep Your Building Dry During Installation.

Protect Thermal Comfort and Indoor Air Quality.

Self-healing Properties Maintain Watertight Seal.

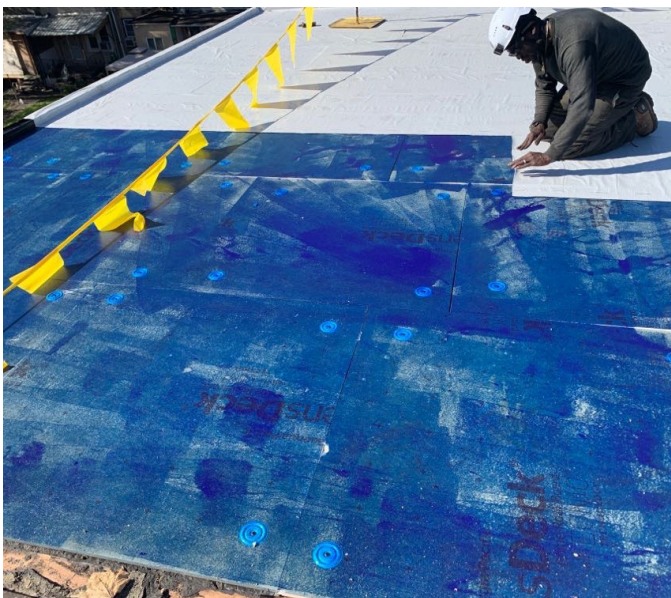

The Garland Company, Inc

3800 East 91st Street, Cleveland, OH 44105

Phone: 216-641-7500 | Toll Free: 800-321-9336 | Fax: 216-641-0633

www.garlandco.com

0523 ©2023 Garland Industries, Inc.

Features & Benefits

Temporary Roof Cover	
Slip-resistant	Surfacing is engineered with a high-strength woven polypropylene film that provides impact and slip resistance to withstand foot traffic and ongoing construction.
Superior UV resistance	VaporSmart® SA has a UV-protected top surface which allows it to remain exposed to the elements for up to 180 days.
Faster Installation	
Superior adhesion	Formulated with SBS-modified asphalt, VaporSmart® SA exhibits best-in-class adhesion to the roof deck and strong lap adhesion (20 pli per ASTM D 1876).
Fewer seams	Finished membrane is 45 mils thick and 39 inches by 75 feet long, resulting in fewer seams and a faster installation.
Compatible with metal decking	VaporSmart® SA is specifically designed to line up with the top flanges of standard Type-B metal decking, with no primer required to adhere to a metal deck.
Watertight	
Self-healing	The rubberized adhesive exhibits self-healing capabilities and accommodates the use of fasteners, staples, nails, and screws while maintaining a watertight seal.
Aggressive adhesion	Strong adhesive backing with peel-off split release film is simple to install and ensures a strong watertight seal.



Advantages of VaporSmart® SA



Impact & slip resistant



UV resistant



Heals watertight around fasteners



Easy installation



Long-lasting air barrier/vapor retarder



The Garland Company, Inc

3800 East 91st Street, Cleveland, OH 44105
 Phone: 216-641-7500 | Toll Free: 800-321-9336 | Fax: 216-641-0633
www.garlandco.com
 0523 ©2023 Garland Industries, Inc.